



# SYSTEMVU with Field Installed 2 Position Damper

**Mingledorff's Technical Service**

Technical Service Manager

This presentation is intended for informational purposes only and does not replace legal advice or independent professional judgement.

Mingledorff's does not warrant the accuracy, completeness or usefulness of information available in this presentation.

Any reliance you place on such information is strictly at your own risk, and Mingledorff's will not be liable for any losses and damages in connection with your use of such information.

Attendees should note that sessions are audio-recorded and may be published in various media, including print, audio and video formats without further notice.



# SYSTEMVU Configuration for 2 Position Damper




- Steps to Configure: When prompt to enter Password use>1111
- Menu > Settings > Unit Configurations > Economizer >
- Vent Method > select 2 = 2POS DMPR and Enter
- Then press Back once, then arrow up to General

# SYSTEMVU Configuration for 2 Position Damper



- Press Enter > arrow down to 2POS/ERU Channel and Enter
- Select 2 = MBB RLY 06 and press Enter
- Then press Back once and then press Menu
- Ready to go!

## DAMPER ADJUSTMENT

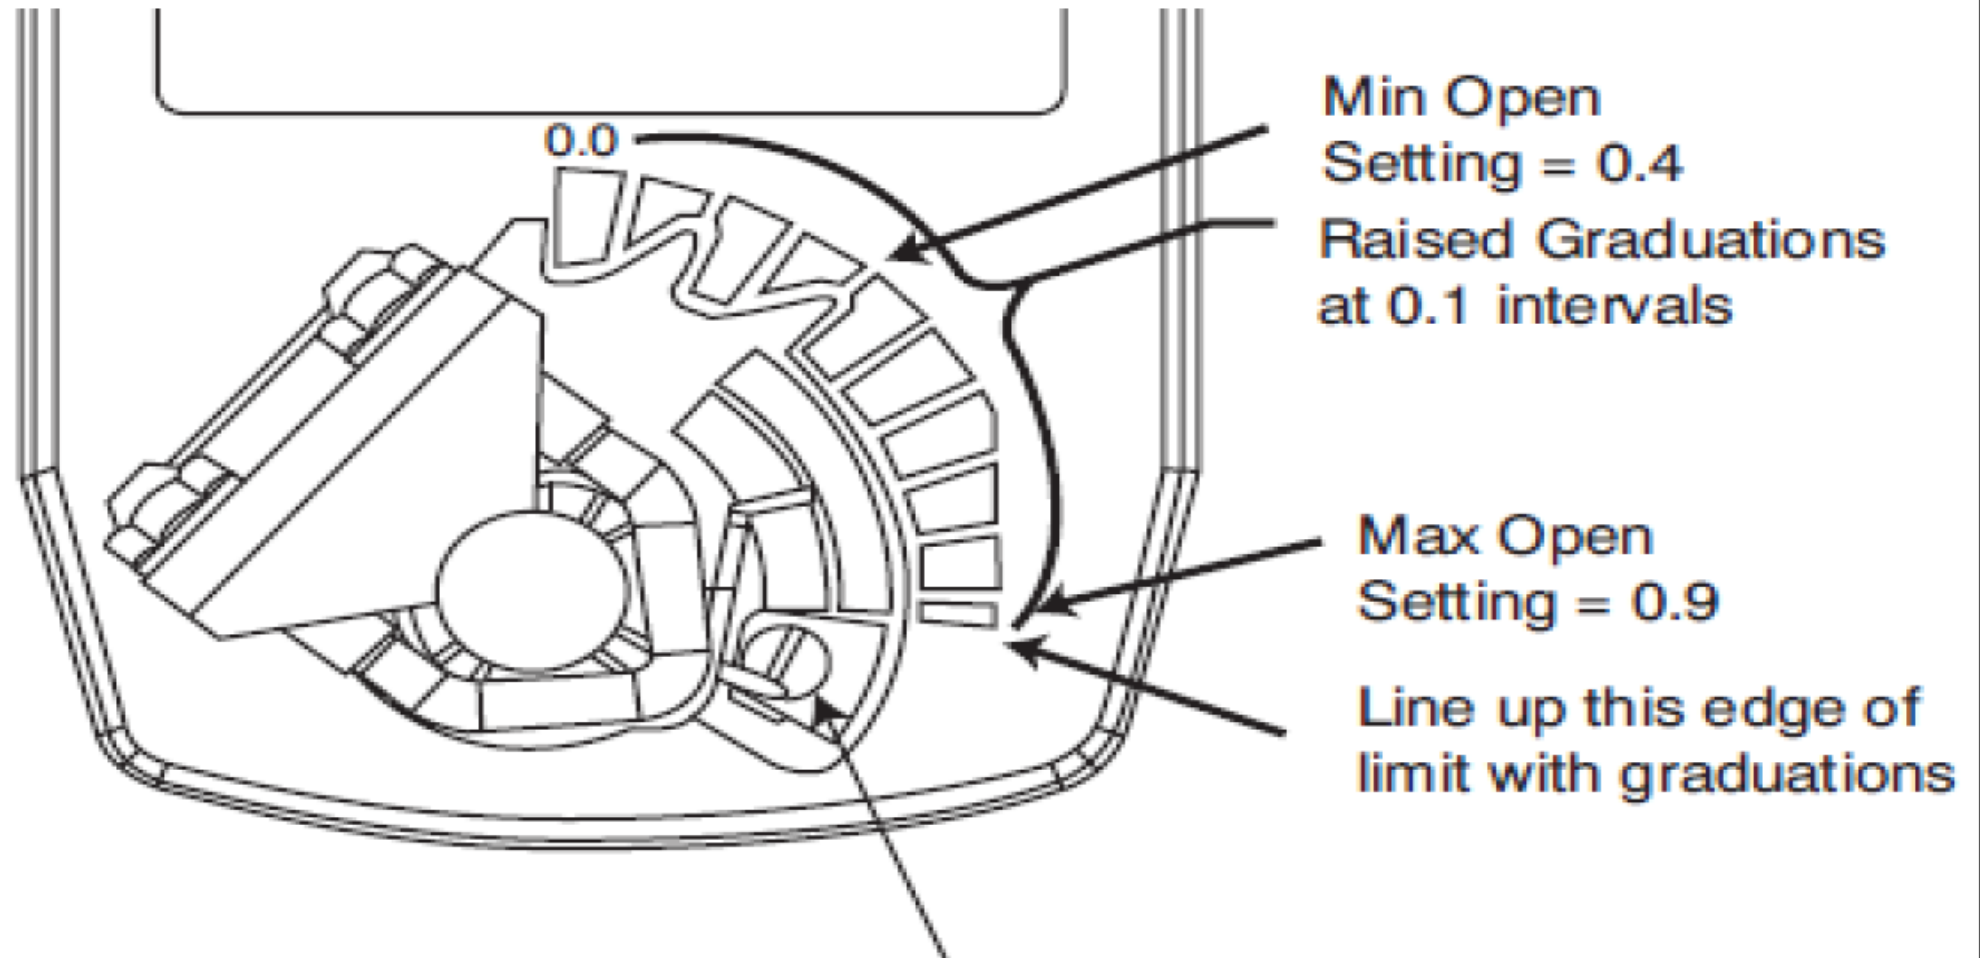

- Carrier 48-50FC-GC-05T
- Carrier 50FCQ-GCQ-04T
- Carrier S-VU-FE-GE-01T



***THANK YOU***